



Rotative Pump

Series PR

APPLICATION:


- Professional coffee machines
- Cooling systems
- Professional machines with food fluids
- Water treatment
- Water dispensers

SPECIFICATIONS:

Outlet	G 3/8 - 3/8 NPT (on request)
Fluids	Water and food fluids
Max Ambient Temperature	70°C
Max Fluid Temperature	70°C
Dead head Pressure	See graph
Free Flow Rate	See graph
Limit speed rotation	1720 rpm
Life	3.000 hours

MATERIALS IN CONTACT WITH THE FLUID:

Body	PPS
Pumping chamber	Graphite
Rotor	Stainless Steel series 300
Spring	Stainless Steel series 300
Seals	EPDM /FKM
Seal shaft seal	PTFE + Graphite/Ceramic

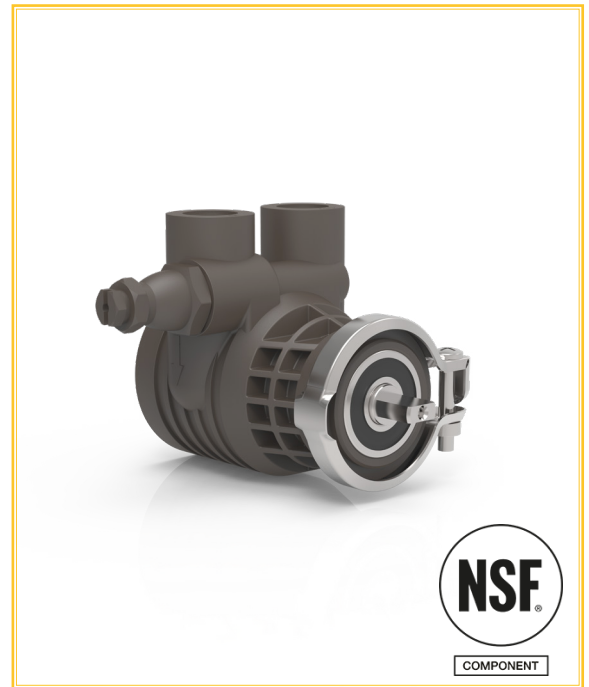


Proven sealing system for reliable and long life application

CERTIFIED BY:

Regulation (EC) n. 1935/2004
NSF169 Certified

Code	l/h	Graphic	Peso g
PR100PE3G0900-T0	100	A	510
PR150PE3G0900-T0	150	B	
PR200PE3G0900-T0	200	C	
PR300PE3G0900-T0	270	D	
PR400PE3G0900-T0	400	E	

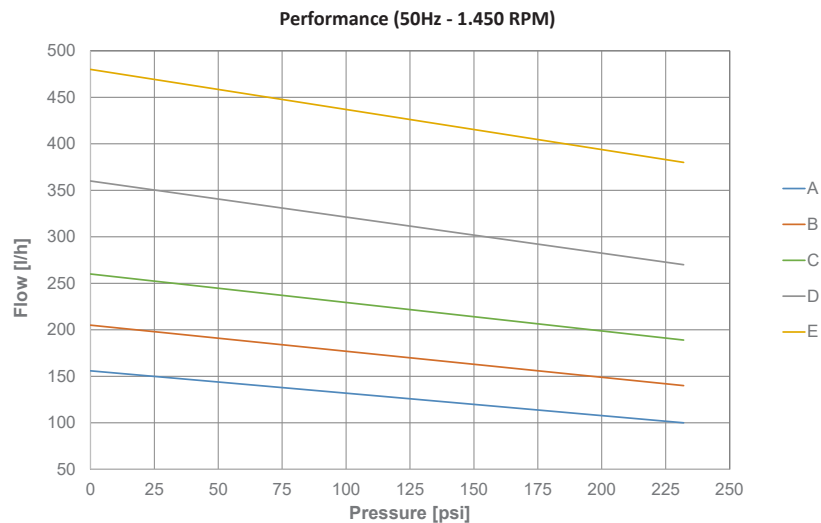


Note


Elastomers EPDM | Standard or balanced bypass valve | Hydraulic curves measured with constant speed, water at 20°C and completely closed bypass | Available on request and with minimum quantities.

"ODE " reserves the right to carry out technical and aesthetic modifications without prior notice.

ORDERING CODE

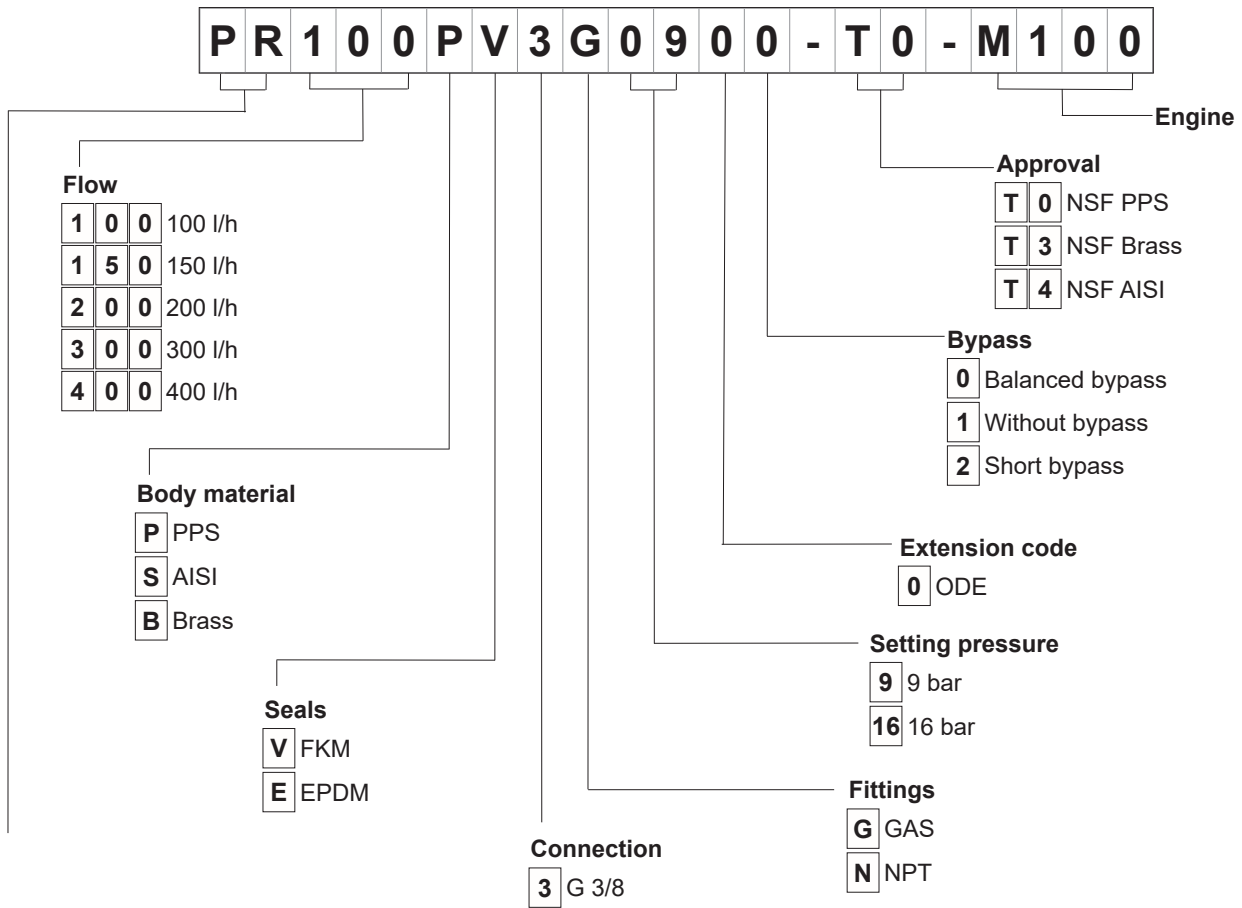

DIMENSIONS:

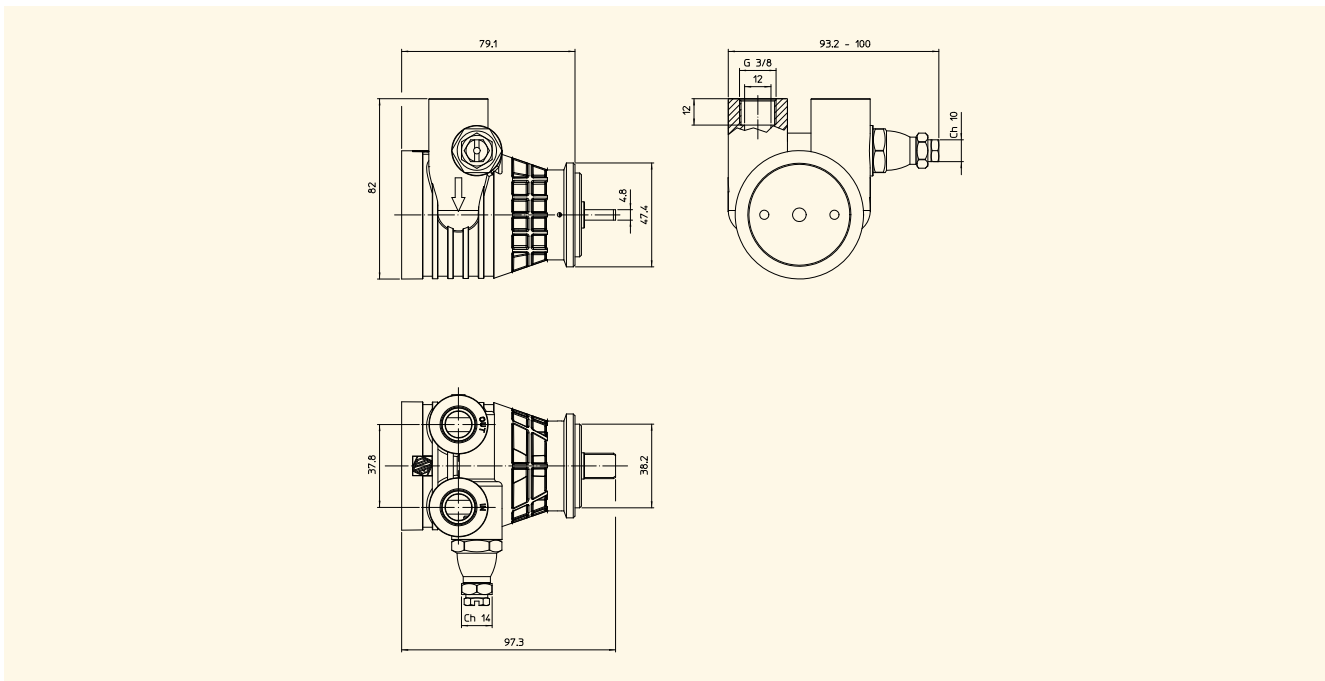

ACCESSORIES:

In combination with the Pump, it's possible to purchase the customized motor according to the application. For further information please contact our Sales Offices.