



Solenoid valve 2/2 way N.C. Direct acting - Lateral regulation

212A4KV25-RL

PRESENTATION:

Direct acting S.V. for interception of fluids compatible with the construction materials.

Minimum operational pressure is not required.

The materials used and the tests undertaken ensure maximum reliability and duration.

USE: Automation
Heating

PIPES G 1/8

COILS:


8W - Ø 13	
BDA - BSA	155°C (class F)
BDV	180°C (class H)
12W - Ø 13	
UDA	155°C (class F)
14W - Ø 13	
GDH - GDV	180°C (class H)



Max. allowable pressure (PS) 40 bar

Ambient temperature:

See coils catalogue page for its compatibility.

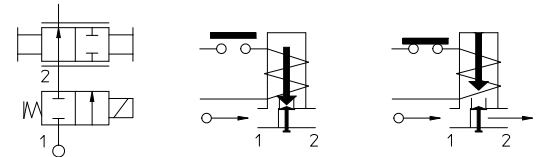

Gaskets	Temperature	Medium
V=FKM (fluoroelastomer)	- 10°C + 140°C	mineral oils (2°E), gasoline gas oil, fuel oils (7°E)

Pipe ISO 228/1	Code	Max viscosity		Ø mm	Kv l/mn	Power watt	Power		
		cSt	°E				min bar	M.O.P.D.	
								AC bar	DC bar
G 1/8	212A4KV25-RL	53	~ 7	2,5	3,2	8 12 14	0	14 30	9 25

Note

Available on request and with minimum quantities.

The "ODE" reserves the right to carry out technical and aesthetic modifications without prior notice.

MATERIALS:

Body	Brass - UNI EN 12164 CW614N
Welded armature tube	Stainless steel AISI series 300 + Brass - UNI EN 12164 CW 614N
Fixed core	Stainless steel AISI series 400
Plunger	Stainless steel AISI series 400
Phase displacement ring	Copper - Cu 99,9%
Spring	Stainless steel AISI series 300
Seal	V=FKM
Orifice: Insert slot	Stainless steel AISI series 300

On request:


Connector	Pg 9 or Pg 11
Connector conformity	ISO 4400

FEATURES:


Electrical conformity	IEC 335
Protection degree	IP 65 EN 60529 (DIN 40050) with coil fitted by connector.

SPARE PARTS:

- Coil:**
See coils list
- Complete plunger:**
Code R450898/V
- Complete armature tube:**
Code R450691
- Gasket O-Ring:**
Code R990000/VX
- Regulation screw:**
Code R450173/V

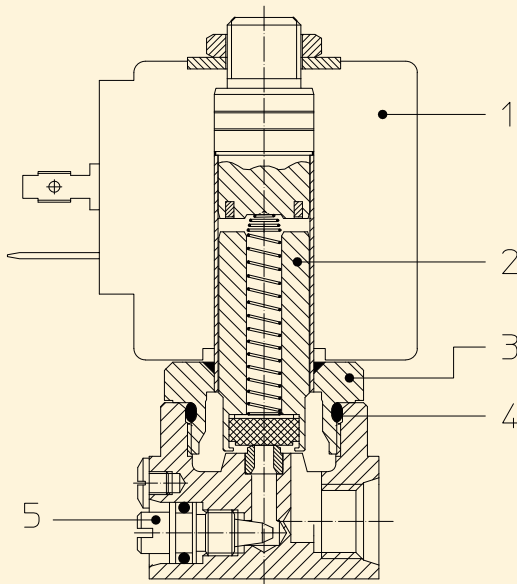

DIMENSIONS:

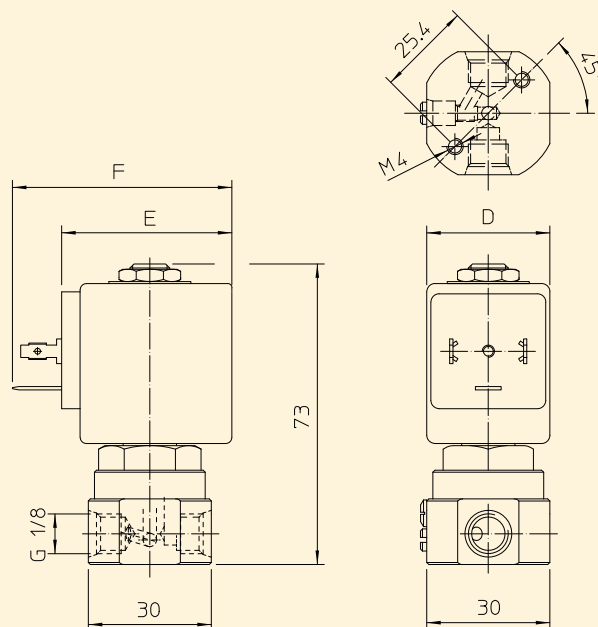

COIL TYPE	POWER ABSORPTION			DIMENSIONS		
	W =	Hold VA ~	Inrush VA ~	D mm	E mm	F mm
B	8	14,5	25	30	42	54
U	12	23	35	36	48	60
G	14	27	43	52	55	67